



environment friendly & advanced technologies for stores




APPLE SERIES





environment friendly & advanced technologies for stores

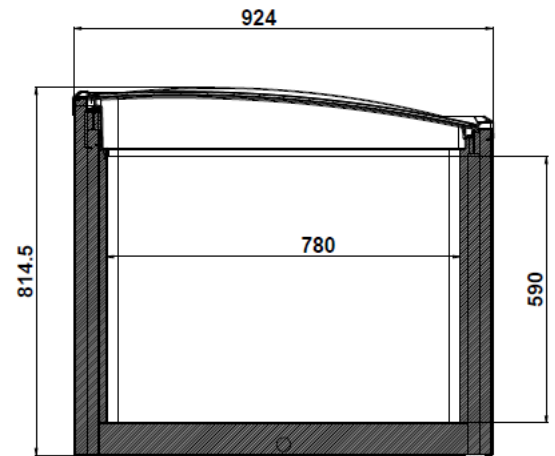


APPLE 1500



Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
External Dimensions (WxDxH)	1508*932*894
Internal Dimensions (WXDXH)	1360* 780 * 590
Packed Dimensions (WXDXH)	1615* 1035 * 940
Net Volume (Lt)	488
Gross Volume (Lt)	667
Product Projection Area (m ²)	1,40 m ²
Net Weight (kg)	122
Gross Weight (kg)	145
Refrigerant Gass	R404 / R290(OPT)
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Type	ELEKTRONIC
Frame Resistance	HOT GASS
Defrost	OPTIONAL
Adjustable Leg	x4
Internal Lightening	LED
Cabinet Outer Sheet	Prepainted Sheet
Cabinet Inner Sheet	Prepainted Sheet
Insulation Material	Polyurethane
PU Thickness	72 mm



environment friendly & advanced technologies for stores

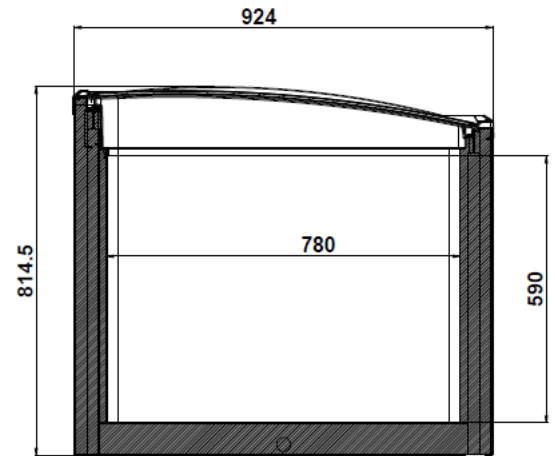


APPLE 1880



Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
External Dimensions (WXDXH)	1879 * 932 * 894
Internal Dimensions (WXDXH)	1731 * 780 * 590
Packed Dimensions (WXDXH)	1986 * 1035 * 940
Net Volume (Lt)	643
Gross Volume (Lt)	870
Product food Area (m ²)	1,74 m ²
Net Weight (kg)	134
Gross Weight (kg)	157
Refrigerant Gass	R404 / R290(OPT)
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Type	ELEKTRONIC
Frame Resistance	HOT GASS
Defrost	OPTIONAL
Adjustable Leg	x4
Internal Lightening	LED
Cabinet Outer Sheet Type	Prepainted Sheet
Cabinet Inner sheet type	Prepainted Sheet
Insulation Material	Polyurethane
PU Thickness	72 mm



environment friendly & advanced technologies for stores

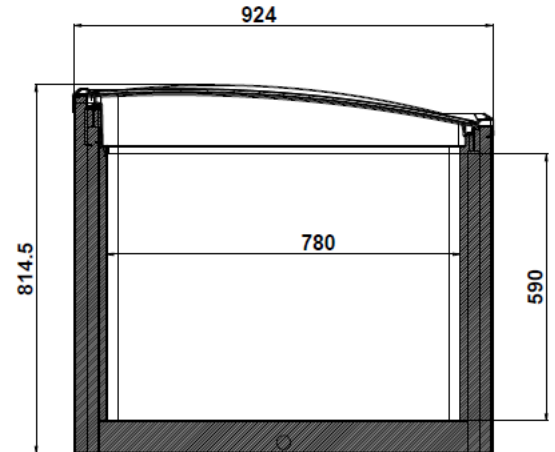


APPLE 2000



Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
External Dimensions (WXDXH)	2008*932*894
Internal Dimensions (WXDXH)	1860* 780 * 590
External Dimensions with Package (WXDXH)	2115 * 1035 * 940
Net Volume (Lt)	696
Gross Volume (Lt)	941
Product food Area (m ²)	1,87 m ²
Net Weight (kg)	139
Gross Weight (kg)	162
Refrigerant Gass	R404 / R290(OP)
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Type	ELEKTRONIC
Frame Resistance	HOT GASS
Defrost	OPTIONAL
Adjustable Leg	x4
Internal Lightening	LED
Cabinet Outer Sheet Type	Prepainted Sheet
Cabinet Inner sheet type	Prepainted Sheet
Insulation Material	Polyurethane
PU Thickness	72 mm



environment friendly & advanced technologies for stores

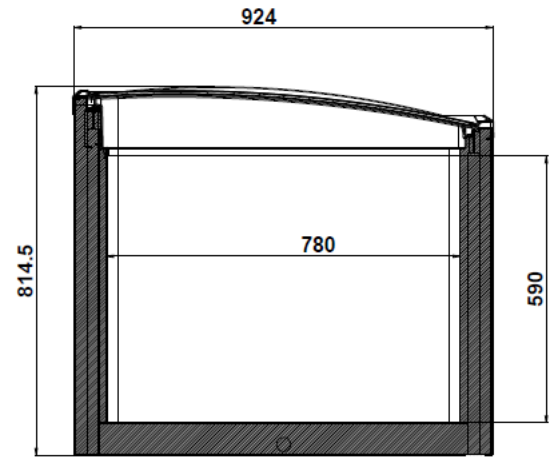


APPLE 2120



Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
External Dimensions (WXDXH)	2124*932*894
Internal Dimensions (WXDXH)	1976 * 780 * 590
External Dimensions with Package (WXDXH)	2231 * 1035 * 940
Net Volume (Lt)	745
Gross Volume (Lt)	1005
Product food Area (m ²)	1,97 m ²
Net Weight (kg)	139
Gross Weight (kg)	162
Refrigerant Gass	R404 / R290(OPT)
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Type	ELEKTRONIC
Frame Resistance	HOT GASS
Defrost	OPTIONAL
Adjustable Leg	x4
Internal Lightening	LED
Cabinet Outer Sheet Type	Prepainted Sheet
Cabinet Inner sheet type	Prepainted Sheet
Insulation Material	Polyurethane
PU Thickness	72 mm



environment friendly & advanced technologies for stores

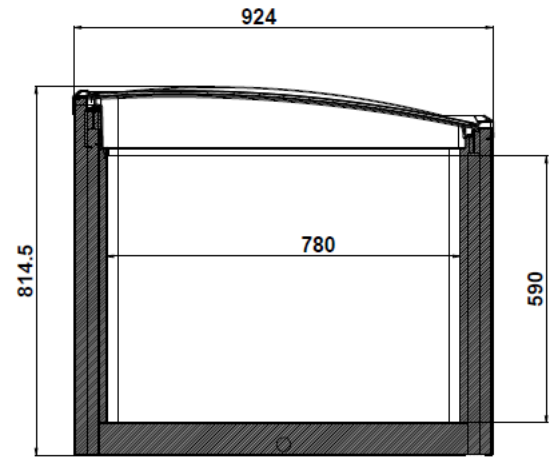


APPLE 2500



Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
External Dimensions (WXDXH)	2508*932*894
Internal Dimensions (WXDXH)	2360 * 780 * 590
Packed Dimensions (WXDXH)	2615 * 1035 * 940
Net Volume (Lt)	905
Gross Volume (Lt)	1216
Product food Area (m ²)	2,33 m ²
Net Weight (kg)	152
Gross Weight (kg)	175
Refrigerant Gass	R404 / R290(OPT)
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Tipi / Thermostat Type	ELEKTRONIC
Frame Resistance	HOT GASS
Defrost	OPTIONAL
Adjustable Leg	x4
Internal Lightening	LED
Cabinet Outer Sheet Type	Prepainted Sheet
Cabinet Inner sheet type	Prepainted Sheet
Insulation Material	Polyurethane
PU Thickness	72 mm



environment friendly & advanced technologies for stores

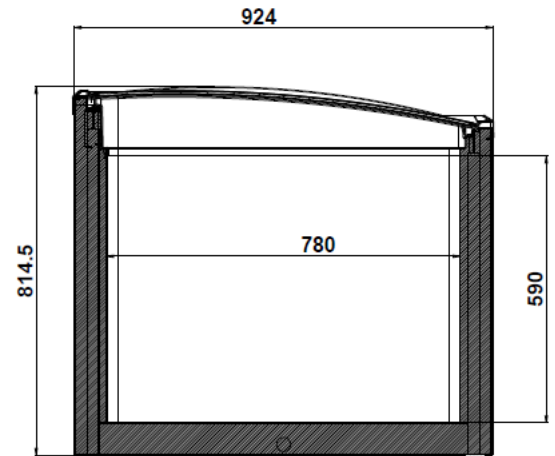

APPLE Head



Temperature Range	NTS: -18/-23 C° - PTS: -1/+5 C°
External Dimensions (WXDXH)	2008*932*894
Internal Dimensions (WXDXH)	1860 * 780 * 537
External Dimensions with Package (WXDXH)	2115 * 1035 * 940
Net Volume (Lt)	620
Gross Volume (Lt)	864
Product food Area (m ²)	1,87 m ²
Net Weight (kg)	132
Gross Weight (kg)	155
Refrigerant Gass	R404 / R290(OP)
Voltage / Frequency	220 V / 50-60 Hz
Thermostat Type	ELEKTRONIC
Frame Resistance	HOT GASS
Defrost	OPTIONAL
Adjustable Leg	x4
Internal Lightening	LED
Cabinet Outer Sheet Type	Prepainted Sheet
Cabinet Inner sheet type	Prepainted Sheet
Insulation Material	Polyurethane
PU Thickness	72 mm